

# Self-trapping of light and nonlinear localized modes in two-dimensional photonic crystals

Serge F. Mingaleev<sup>a,b</sup> and Yuri S. Kivshar<sup>a</sup>

<sup>a</sup> Nonlinear Physics Group, Research School of Physical Sciences and Engineering  
Australian National University, Canberra ACT 0200, Australia

<sup>b</sup> Bogolyubov Institute for Theoretical Physics, 03143 Kiev, Ukraine

## ABSTRACT

We develop a theory of nonlinear localized modes in two-dimensional (2D) photonic crystals and photonic-crystal waveguides. Employing the technique based on the Green function, we demonstrate that it provides an accurate method for investigating the existence and properties of localized defect modes. Using this technique, we describe the existence of nonlinear guided modes in photonic crystal waveguides and study their unique properties including bistability. We also show that low-amplitude nonlinear modes near the band edge of a reduced-symmetry 2D square-lattice photonic crystals, which are usually unstable, can be stabilized due to effective long-range linear and nonlinear interactions.

**Keywords:** Photonic crystals, nonlinear waveguides, the Green function, nonlinear localized modes, linear stability.

## 1. INTRODUCTION

Photonic crystals are usually viewed as an optical analog of semiconductors that modify the properties of light similar to a microscopic atomic lattice that creates a semiconductor band-gap for electrons.<sup>1</sup> It is therefore believed that by replacing relatively slow electrons with photons as the carriers of information, the speed and band-width of advanced communication systems will be dramatically increased, thus revolutionizing the telecommunication industry. Recent fabrication of photonic crystals with a band gap at optical wavelengths from 1.35  $\mu\text{m}$  to 1.95  $\mu\text{m}$  makes this promise very realistic.<sup>2</sup>

To employ the high-tech potential of photonic crystals, it is crucially important to achieve a dynamical tunability of their band gap.<sup>3</sup> This idea can be realized, in particular, by changing the light intensity in the so-called *nonlinear photonic crystals*, having a periodic modulation of the nonlinear refractive index. Exploration of *nonlinear properties* of photonic band-gap (PBG) materials is an important direction of research that opens new applications of photonic crystals<sup>4</sup> for all-optical signal processing and switching, allowing an effective way to create tunable band-gap structures operating entirely with light.

One of the important physical concepts associated with nonlinearity is *the energy self-trapping and localization*. In the linear physics, the idea of localization is always associated with disorder that breaks translational invariance. However, during the recent years it was demonstrated that localization can occur in the absence of any disorder and solely due to nonlinearity in the form of *intrinsic localized modes*.<sup>5</sup> A rigorous proof of the existence of time-periodic, spatially localized solutions describing such nonlinear modes has been presented for a broad class of Hamiltonian coupled-oscillator nonlinear lattices,<sup>6</sup> but approximate analytical solutions can also be found in many other cases, demonstrating a generality of the concept of *nonlinear localized modes*.

Nonlinear localized modes can be easily identified in numerical molecular-dynamics simulations in many different physical models,<sup>5</sup> but only recently the *first experimental observations* of spatially localized nonlinear modes have been reported in mixed-valence transition metal complexes,<sup>7</sup> quasi-one-dimensional antiferromagnetic chains,<sup>8</sup> and arrays of Josephson junctions.<sup>9</sup> Importantly, very similar types of spatially localized nonlinear modes have been experimentally observed in *macroscopic* mechanical<sup>10</sup> and guided-wave optical<sup>11</sup> systems.

Recent experimental observations of nonlinear localized modes, as well as numerous theoretical results, indicate that nonlinearity-induced localization and spatially localized modes can be expected in physical systems of very

---

S.F.M.: sfm124@rsphysse.anu.edu.au; Y.S.K.: ysk124@rsphysse.anu.edu.au; <http://rsphysse.anu.edu.au/~sfm124/>

different nature. From the viewpoint of possible practical applications, self-localized states in optics seem to be the most promising ones; they can lead to different types of nonlinear all-optical switching devices where light manipulates and controls light itself by varying the input intensity. As a result, the study of *nonlinear localized modes in photonic structures* is expected to bring a variety of realistic applications of intrinsic localized modes.

One of the promising fields where the concept of nonlinear localized modes may find practical applications is the physics of *photonic crystals* [or photonic band gap (PBG) materials] – periodic dielectric structures that produce many of the same phenomena for photons as the crystalline atomic potential does for electrons.<sup>1</sup> Three-dimensional (3D) photonic crystals for visible light have been successfully fabricated only within the past two years, and presently many research groups are working on creating tunable band-gap switches and transistors operating entirely with light. The most recent idea is to employ nonlinear properties of band-gap materials, thus creating *nonlinear photonic crystals* including those where nonlinear susceptibility is periodic as well.<sup>4,12</sup>

Nonlinear photonic crystals (as well as photonic crystals with embedded nonlinear impurities) create an ideal environment for the generation and observation of nonlinear localized photonic modes. In particular, the existence of such modes for the frequencies in the photonic band gaps has been predicted<sup>13</sup> for 2D and 3D photonic crystals with Kerr nonlinearity. Nonlinear localized modes can be also excited at nonlinear interfaces with quadratic nonlinearity,<sup>14</sup> or along dielectric waveguide structures possessing a nonlinear Kerr-type response.<sup>15</sup>

In this paper, we study self-trapping of light and nonlinear localized modes in nonlinear photonic crystals and photonic crystal waveguides. For simplicity, we consider the case of a 2D photonic crystal with embedded nonlinear rods (impurities) and demonstrate that the effective interaction in such a nonlinear waveguide structure is nonlocal,<sup>16</sup> so that the nonlinear effects can be described by a nontrivial generalization of the nonlinear lattice models that include the long-range coupling and nonlocal nonlinearity. We describe several different types of nonlinear guided-wave states in photonic crystal waveguides and analyses their properties. Also, we predict the existence of nonlinear localized modes, highly localized modes analogous to gap solitons in the continuum limit, in the reduced-symmetry nonlinear photonic crystals.

## 2. BASIC EQUATIONS

Let us consider a 2D photonic crystal created by a periodic lattice of parallel, infinitely long dielectric rods in air (see Fig. 1). We assume that the rods are parallel to the  $x_3$  axis, so that the system is characterized by the dielectric constant  $\varepsilon(\vec{x}) = \varepsilon(x_1, x_2)$ . As is well known,<sup>1</sup> the photonic crystals of this type can possess a complete band gap for the  $E$ -polarized (with the electric field  $\vec{E} \parallel \vec{x}_3$ ) light propagating in the  $(x_1, x_2)$ -plane. The light evolution is governed by the scalar wave equation

$$\nabla^2 E(\vec{x}, t) - \frac{1}{c^2} \partial_t^2 [\varepsilon(\vec{x})E] = 0, \quad (1)$$

where  $\nabla^2 \equiv \partial_{x_1}^2 + \partial_{x_2}^2$  and  $E$  is the  $x_3$  component of  $\vec{E}$ . Taking the electric field in the form  $E(\vec{x}, t) = e^{-i\omega t} E(\vec{x}, t | \omega)$ , where  $E(\vec{x}, t | \omega)$  is a slowly varying envelope, i.e.  $\partial_t^2 E(\vec{x}, t | \omega) \ll \omega \partial_t E(\vec{x}, t | \omega)$ , Eq. (1) reduces to


$$\left[ \nabla^2 + \varepsilon(\vec{x}) \left( \frac{\omega}{c} \right)^2 \right] E(\vec{x}, t | \omega) \simeq -2i \varepsilon(\vec{x}) \frac{\omega}{c^2} \frac{\partial E}{\partial t}. \quad (2)$$

In the stationary case, i.e. when the r.h.s. of Eq. (2) vanishes, this equation describes an eigenvalue problem which can be solved, e.g. by the plane waves method,<sup>17</sup> in the case of a perfect photonic crystal, for which the dielectric constant  $\varepsilon(\vec{x}) \equiv \varepsilon_p(\vec{x})$  is a periodic function defined as

$$\varepsilon_p(\vec{x} + \vec{s}_{ij}) = \varepsilon_p(\vec{x}) \quad \text{with} \quad \vec{s}_{ij} = i \vec{a}_1 + j \vec{a}_2, \quad (3)$$

where  $\vec{a}_1$  and  $\vec{a}_2$  are the lattice vectors, whereas  $i$  and  $j$  are some arbitrary integers.

For definiteness, we consider the 2D photonic crystal earlier analyses in the linear limit.<sup>18,19</sup> That is, we assume that cylindrical rods with radius  $r_0 = 0.18a$  and dielectric constant  $\varepsilon_0 = 11.56$  form a square lattice with the distance  $a$  between two neighboring rods, so that  $\vec{a}_1 = a\vec{x}_1$  and  $\vec{a}_2 = a\vec{x}_2$ . The frequency band structure for this type of 2D photonic crystal is shown in Fig. 1 where, using the notations of the solid-state physics, the wave dispersion is mapped onto the Brillouin zone of the so-called *reciprocal lattice* that faces are known as  $\Gamma$ ,  $M$ , and  $X$ . As follows from Fig. 1, there exists a large (38%) band gap that extends from the lower cut-off frequency,  $\omega = 0.302 \times 2\pi c/a$ , to the upper band-gap frequency,  $\omega = 0.443 \times 2\pi c/a$ . If the frequency of a low-intensity light falls into the band gap, the light cannot propagate through the photonic crystal and is reflected.

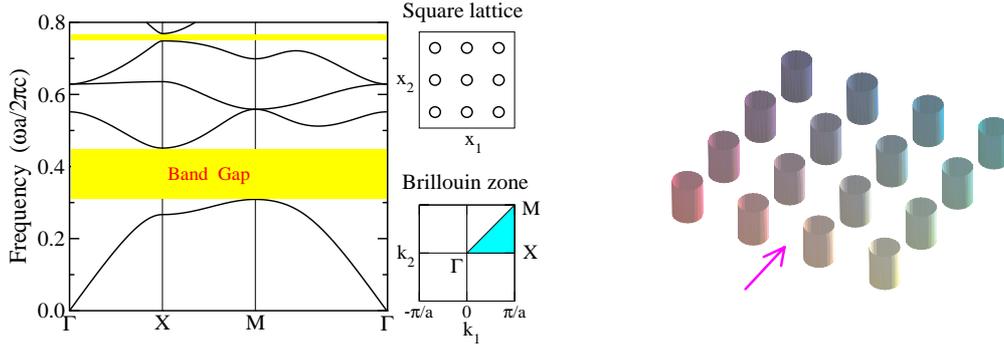

**Figure 1.** The band-gap structure of the photonic crystal consisting of a square lattice of dielectric rods with  $r_0 = 0.18a$  and  $\varepsilon_0 = 11.56$  (the band gaps are shaded). The top center inset shows a cross-sectional view of the 2D photonic crystal depicted in the right inset. The bottom center inset shows the corresponding Brillouin zone, with the irreducible zone shaded.

### 3. DEFECT MODES: THE GREEN FUNCTION APPROACH

One of the most intriguing properties of photonic band gap crystals is the emergence of exponentially localized modes that may appear within the photonic band gaps when a defect is embedded into an otherwise perfect photonic crystal. A simplest way to create a defect in a 2D photonic crystal is to introduce an additional defect rod with the radius  $r_d$  and the dielectric constant  $\varepsilon_d(\vec{x})$ . In this case, the dielectric constant  $\varepsilon(\vec{x})$  can be presented as a sum of periodic and defect-induced terms, i.e.  $\varepsilon(\vec{x}) = \varepsilon_p(\vec{x}) + \varepsilon_d(\vec{x})$ , and, therefore, Eq. (2) takes the form

$$\left[ \nabla^2 + \left( \frac{\omega}{c} \right)^2 \varepsilon_p(\vec{x}) \right] E(\vec{x}, t | \omega) = -\hat{\mathcal{L}} E(\vec{x}, t | \omega), \quad (4)$$

where the operator

$$\hat{\mathcal{L}} = \left( \frac{\omega}{c} \right)^2 \varepsilon_d(\vec{x}) + 2i \varepsilon(\vec{x}) \frac{\omega}{c^2} \frac{\partial}{\partial t} \quad (5)$$

is introduced for convenience. Equation (4) can also be written in the equivalent integral form

$$E(\vec{x}, t | \omega) = \int d^2 \vec{y} G(\vec{x}, \vec{y} | \omega) \hat{\mathcal{L}} E(\vec{y}, t | \omega), \quad (6)$$

where  $G(\vec{x}, \vec{y} | \omega)$  is the Green function which is defined, in a standard way, as a solution of the equation

$$\left[ \nabla^2 + \left( \frac{\omega}{c} \right)^2 \varepsilon_p(\vec{x}) \right] G(\vec{x}, \vec{y} | \omega) = -\delta(\vec{x} - \vec{y}). \quad (7)$$

General properties of the Green function of a perfect 2D photonic crystal are known.<sup>17</sup> Here, we notice that the Green function is *symmetric*, i.e.  $G(\vec{x}, \vec{y} | \omega) = G(\vec{y}, \vec{x} | \omega)$ , and *periodic*, i.e.  $G(\vec{x} + \vec{s}_{ij}, \vec{y} + \vec{s}_{ij} | \omega) = G(\vec{x}, \vec{y} | \omega)$ , where  $\vec{s}_{ij}$  is defined by Eq. (3).


The Green function can be calculated by means of the Fourier transform

$$G(\vec{x}, \vec{y} | \omega) = \int_{-\infty}^{\infty} dt e^{i\omega t} G(\vec{x}, \vec{y}, t) \quad (8)$$

applied to the time-dependent Green function governed by the equation

$$[\nabla^2 - \varepsilon_p(\vec{x}) \partial_t^2] G(\vec{x}, \vec{y}, t) = -\delta(t) \delta(\vec{x} - \vec{y}), \quad (9)$$

which has been solved by the finite-difference time-domain method.<sup>20</sup>

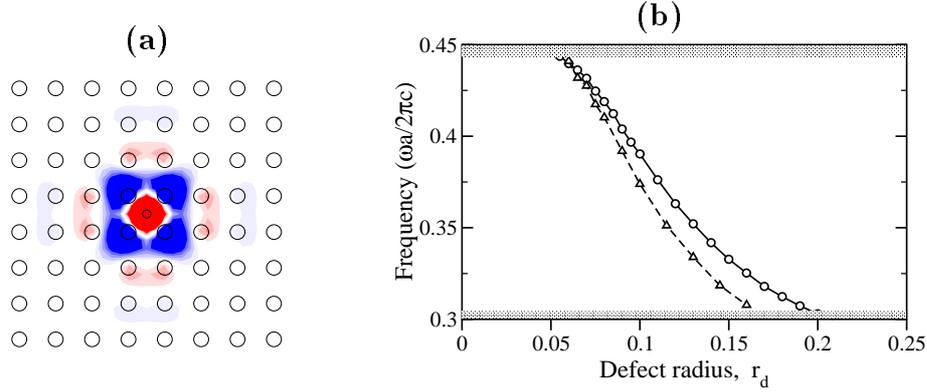

**Figure 2.** (a) Field structure of a linear localized mode supported by a single defect rod with radius  $r_d = 0.1a$  and  $\varepsilon_d = 11.56$  in a square-lattice photonic crystal with  $r_0 = 0.18a$  and  $\varepsilon_0 = 11.56$ . (b) Frequency of the defect mode as a function of the radius  $r_d$ : calculated precisely from Eq. (6) (full line with circles) and approximately from Eq. (14) (dashed line with triangles).

Now that we have calculated the Green function, we can figure out the defect states solving Eq. (6) directly. For example, Fig. 2(a) shows a defect mode created by introducing a single defect rod with the radius  $r_d = 0.1a$  and dielectric constant  $\varepsilon_d = 11.56$  into the 2D photonic crystal shown in Fig. 1. Although direct numerical solution of the integral equation (6) remains possible even in the case of a few defect rods, it becomes severely limited by the current computer facilities as soon as we increase the number of the defect rods and start investigation of the line defects (waveguides) and their branches. Thus, looking for new approximate numerical techniques which could combine reasonable accuracy, flexibility, and power to forecast new effects is an issue of the key importance.

#### 4. EFFECTIVE DISCRETE NONLINEAR EQUATION

Studying the electric field distribution of the defect mode in Fig. 2(a), one can suggest that a reasonably accurate approximation should be provided by the assumption that the electric field inside the defect rod remains constant. Indeed, let us assume that nonlinear defect rods embedded into a photonic crystal are located at the points  $\vec{x}_m$ , where  $m$  is the index (or a combination of two indices in the case of a two-dimensional array of defect rods) introduced for explicit numbering of the defect rods. In this case, the correction to the dielectric constant is

$$\varepsilon_d(\vec{x}) = \left\{ \varepsilon_d^{(0)} + |E(\vec{x}, t | \omega)|^2 \right\} \sum_m \theta(\vec{x} - \vec{x}_m), \quad (10)$$

where

$$\theta(\vec{x}) = \begin{cases} 1, & \text{for } |\vec{x}| \leq r_d, \\ 0, & \text{for } |\vec{x}| > r_d. \end{cases} \quad (11)$$

The second term in Eq. (10) takes into account a contribution due to the Kerr nonlinearity (we assume that the electric field is scaled with the nonlinear susceptibility,  $\chi^{(3)}$ ). Assuming, as we discussed above, that the electric field  $E(\vec{x}, t | \omega)$  inside the defect rods is almost constant, one can derive, by substituting Eq. (10) into Eq. (6) and averaging over of the cross-section of the rods,<sup>15</sup> an approximate *discrete nonlinear equation*

$$i\sigma \frac{\partial}{\partial t} E_n - E_n + \sum_m J_{n-m}(\omega) (\varepsilon_d^{(0)} + |E_m|^2) E_m = 0, \quad (12)$$

for the amplitudes of the electric field  $E_n(t | \omega) \equiv E(\vec{x}_n, t | \omega)$  inside the defect rods. The parameter  $\sigma$  and the coupling constants

$$J_n(\omega) = \left( \frac{\omega}{c} \right)^2 \int_{r_d} d^2 \vec{y} G(\vec{x}_0, \vec{x}_n + \vec{y} | \omega) \quad (13)$$

are determined in this case by the Green function  $G(\vec{x}, \vec{y} | \omega)$  of the perfect photonic crystal.

To check the accuracy of the approximation provided by Eq. (12), we solved it in the linear limit for the case of a single defect rod. In this case Eq. (12) is reduced to the equation

$$J_0(\omega_d) = 1/\varepsilon_d^{(0)}, \quad (14)$$

from which one can obtain an estimation for the frequency  $\omega_d$  of the localized defect mode. As is seen from Fig. 2(b), the mode frequency calculated in the framework of this approximation is in a good agreement with that calculated directly from Eq. (6), provided the defect radius  $r_d$  is small enough. Even for  $r_d = 0.15a$  an error introduced by the approximation does not exceed 5%. It lends a support to the validity of Eq. (12) allowing us to use it hereafter for studying nonlinear localized modes.


## 5. NONLINEAR WAVEGUIDES IN 2D PHOTONIC CRYSTALS

One of the most promising applications of the PBG structures is a possibility to create a novel type of optical waveguides. In conventional waveguides such as optical fibers, light is confined by *total internal reflection* due a difference in the refractive indices of the waveguide core and cladding. One of the weaknesses of such waveguides is that creating of bends is difficult. Unless the radius of the bend is large compared to the wavelength, much of the light will be lost. This is a serious obstacle for creating “integrated optical circuits”, since the space required for large-radius bends is unavailable. The waveguides based on the PBG materials employ a *different physical mechanism*: the light is guided by a line of coupled defects which possess a localized defect mode with frequency inside the band gap. That is, photonic crystal waveguides operate in a manner similar to resonant cavities, and the light with guiding frequencies is forbidden from propagating in the bulk. Because of this, when a bend is created in a photonic crystal waveguide, the light remains trapped and the only possible problem is that of reflection. However, as was predicted numerically<sup>18,19</sup> and then demonstrated in microwave<sup>21</sup> and optical<sup>22</sup> experiments, it is still possible to get very high transmission efficiency for nearly all frequencies inside the gap.

To employ the high-tech potential of photonic crystal waveguides, it is crucially important to achieve a tunability of their transmission properties. Nowadays, several approaches have been suggested for this purpose. For instance, it has been recently demonstrated both numerically<sup>23</sup> and in microwave experiments,<sup>24</sup> that transmission spectrum of straight and sharply bent waveguides in *quasiperiodic photonic crystals* is rather rich in structure and only some frequencies get near perfect transmission. Another possibility is creation of the *channel drop system* on the bases of two parallel waveguides coupled by the point defects between them. It has been shown<sup>25</sup> that high-Q frequency selective complete transfer can occur between such waveguides by creating resonant defect states of different symmetry and by forcing an accidental degeneracy between them.

However, being frequency selective, the above mentioned approaches do not possess *dynamical tunability* of the transmission properties. The latter idea can be realized by changing the light intensity in the so-called *nonlinear photonic crystal waveguides*,<sup>16</sup> created by inserting an additional row of rods made from a Kerr-type nonlinear material characterized by the third-order nonlinear susceptibility  $\chi^{(3)}$  and the linear dielectric constant  $\varepsilon_d^{(0)}$ . For definiteness, we assume that  $\varepsilon_d^{(0)} = \varepsilon_0 = 11.56$ . Let us assume that the nonlinear defect rods embedded into the photonic crystal along a selected direction  $\vec{s}_{ij}$  are located at the points  $\vec{x}_m = \vec{x}_0 + m \vec{s}_{ij}$ .

As we have already discussed,<sup>16</sup> the Green function  $G(\vec{x}, \vec{y} | \omega)$  and, consequently, the coupling coefficients  $J_m(\omega)$  are usually highly long-ranged functions. For instance, for the photonic crystal used in Fig. 7 we find  $J_m \sim (-1)^m \exp(-0.66m)$  for  $m \geq 2$ , and thus one should take into account the interaction between at least 10 neighbors to reach accurate results. By this means, Eq. (12) is a nontrivial long-range generalization of a 2D discrete nonlinear Schrödinger (NLS) equation extensively studied during the last decade for different applications.<sup>35</sup> It allows us to draw an analogy between the problem under consideration and a class of the NLS equations that describe nonlinear excitations in quasi-one-dimensional molecular chains with long-range (e.g. dipole-dipole) interaction between the particles and local on-site nonlinearities.<sup>26,27</sup> For such systems, it was shown that the effect of nonlocal interparticle interaction brings some new features to the properties of nonlinear localized modes (in particular, bistability in their spectrum). We therefore expect that effective nonlocality in both linear and nonlinear terms of Eq. (12) may also bring similar new features into the properties of nonlinear localized modes excited in the photonic crystal waveguides.

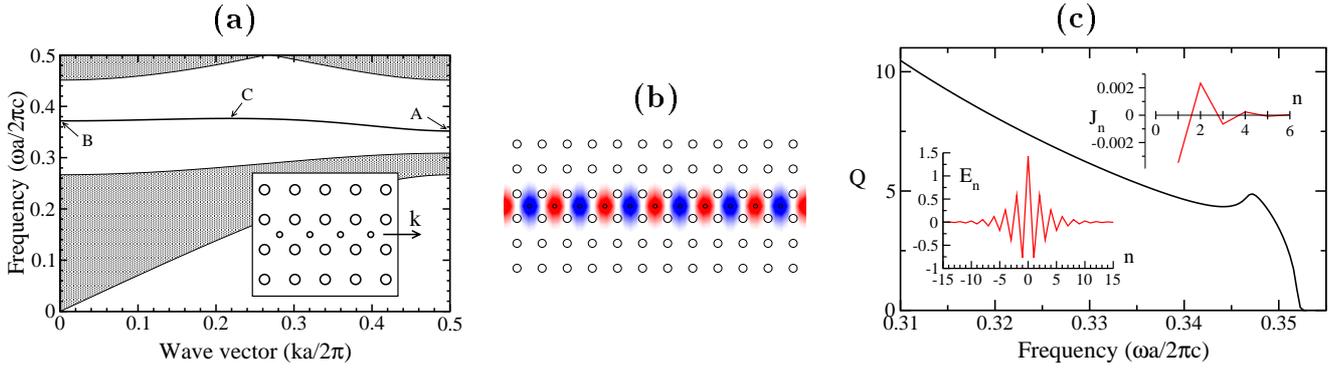


**Figure 3.** (a) Dispersion relation for the photonic crystal waveguide shown in the inset ( $\varepsilon_0 = \varepsilon_d = 11.56$ ,  $r_0 = 0.18a$ ,  $r_d = 0.10a$ ). The grey areas are the projected band structure of the perfect 2D photonic crystal. The frequencies at the indicated points are:  $\omega_A = 0.352 \times 2\pi c/a$ ,  $\omega_B = 0.371 \times 2\pi c/a$ , and  $\omega_C = 0.376 \times 2\pi c/a$  (at  $k = 0.217 \times 2\pi/a$ ). (b) Electric field of the linear guided mode with  $k = \pi/a$ . (c) Mode power  $Q(\omega)$  of the nonlinear mode excited in the corresponding photonic crystal waveguide. The right inset shows the behavior of the coupling coefficients  $J_n(\omega)$  for  $n \geq 1$  ( $J_0 = 0.068$ ) at  $\omega = 0.345 \times 2\pi c/a$ . The left inset shows the profile of the corresponding nonlinear mode.

Let us consider as an example the waveguide created by a row of defect rods which are located at the points  $\vec{x}_0 = (\vec{a}_1 + \vec{a}_2)/2$ , along a straight line in either the  $\vec{s}_{10}$  or  $\vec{s}_{01}$  directions. Instead of a single localized state of an isolated defect, a waveguide supports propagating states (guided modes) with the frequencies in a narrow band located inside the band gap of a perfect crystal [see Fig. 3(a)]. Such guided modes have a periodical profile along the waveguide, and they decay exponentially in the transverse direction [see Fig. 3(b)]. The results for the waveguide being considered are presented in Figs. 3–4. The coupling coefficients  $J_n$  are described by a slowly decaying staggered function of the site number  $n$ , so that the frequency of a linear guided mode, that can be excited in such a waveguide, takes a minimum value at  $k = \pi/a$ , and the corresponding nonlinear modes, emerging from the bottom of the linear guided mode spectrum, are expected to be staggered. Indeed, solving Eq. (12) numerically we find that nonlinearity can lead to the existence of *guided modes localized in both directions*, i.e. in the direction perpendicular to the waveguide, due to the guiding properties of a channel waveguide created by defect rods, and in the direction of the waveguide, due to the nonlinearity-induced self-trapping effect [see Fig. 4(a)-(b)]. Such nonlinear localized modes can be characterized by the mode power which we define, by analogy with the NLS equation, as

$$Q = \sum_n |E_n|^2. \quad (15)$$

This power is closely related to the energy of the electric field in the 2D photonic crystal accumulated in the nonlinear mode. In Fig. 3(c) we plot the dependence of  $Q$  on frequency, for the waveguide geometry shown in Fig. 3(a). It is remarkable that, similar to the NLS models with long-range dispersive interactions,<sup>26,27</sup> we find a *non-monotonic* behavior of the mode power  $Q(\omega)$  for this type of nonlinear photonic crystal waveguides: specifically,  $Q(\omega)$  *increases* in the frequency interval  $0.344 < (\omega a/2\pi c) < 0.347$  [shaded in Fig. 4(c)]. One can expect that, similar to the results earlier obtained for the nonlocal NLS models,<sup>26,27</sup> the nonlinear localized modes in this interval are unstable and will eventually decay or transform into the modes of higher or lower frequency.<sup>28</sup> What counts is that there is an interval of mode power in which *two stable nonlinear localized modes of different widths do coexist*. Since the mode power is closely related to the mode energy, one can expect that the mode energy is also non-monotonic function of  $\omega$ . Such a phenomenon is known as *bistability*, and in the problem under consideration it occurs as a direct manifestation of the nonlocality of the effective (linear and nonlinear) interaction between the defect rod sites.

Being interested in the mobility of the nonlinear localized modes we investigated, in addition to the symmetric modes shown in the left inset in Fig. 3(c) and in Fig. 4(a), also the *antisymmetric localized modes* shown in Fig. 4(b). Our calculations show that the power  $Q(\omega)$  of the antisymmetric modes always (for all values of  $\omega$  and all types of waveguides) exceeds that for symmetric ones [see, e.g., Fig. 4(c)]. Thus, antisymmetric modes are expected to be unstable and they should decay or transform into a lower-energy symmetric modes. In fact, the difference between power of antisymmetric and symmetric modes determines the Peierls-Nabarro barrier which characterizes

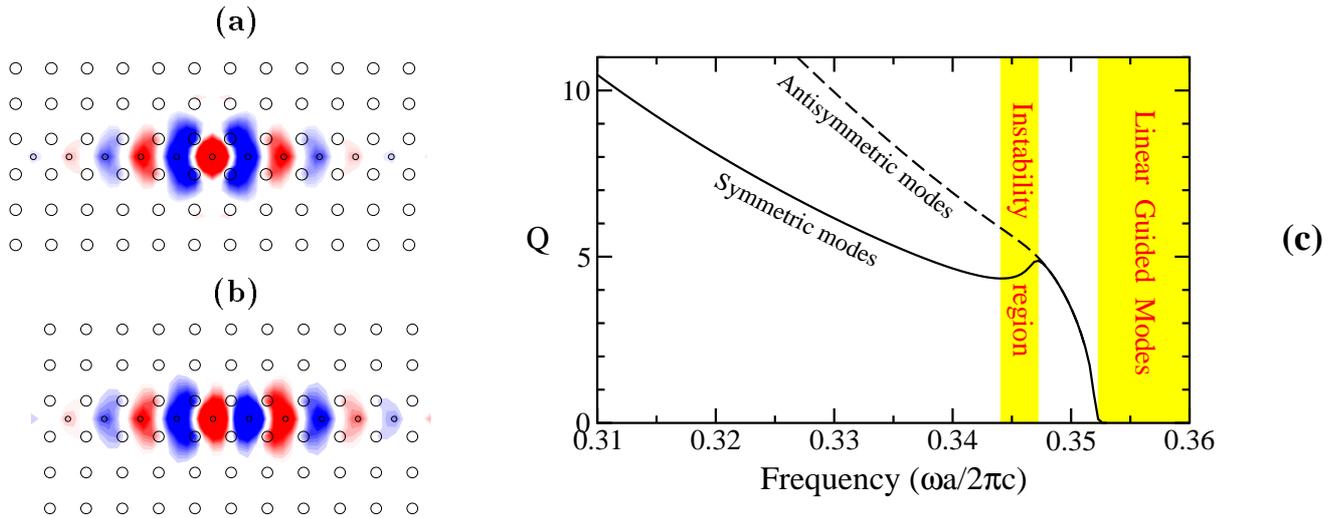

**Figure 4.** Examples of the (a) symmetric and (b) antisymmetric localized modes. The rod positions are indicated by circles and the amplitude of the electric field is indicated by color [red, for positive values, and blue, for negative values]; (c) Power  $Q$  vs. frequency dependencies calculated for two modes of different symmetry in the photonic crystal waveguide shown in Fig. 3.

the mobility of nonlinear localized modes in discrete systems. One can see in Fig. 4(c) that the Peierls-Nabarro barrier is negligible for  $0.347 < (\omega a/2\pi c) < 0.352$  and thus such localized modes should be mobile. However, the Peierls-Nabarro barrier becomes sufficiently large for highly localized modes with  $\omega < 0.344 \times 2\pi c/a$  and, as a consequence, such modes should be immobile. Hence, the bistability phenomenon in the photonic crystal waveguides of the type depicted in Figs. 3–4 opens up fresh opportunities<sup>27</sup> for *switching* between immobile localized modes (used for energy storage) and mobile localized modes (used for energy transport).


The results presented above are obtained for linear photonic crystals with nonlinear waveguides created by a row of defect rods. However, we have carried out the same analysis for the general case of a *nonlinear photonic crystal* that is created by rods of different size but made of the same nonlinear material. Importantly, we have found relatively small difference in all the results presented above provided nonlinearity is weak.

## 6. SELF-TRAPPING OF LIGHT IN A REDUCED-SYMMETRY 2D NONLINEAR PHOTONIC CRYSTAL

A low-intensity light cannot propagate through a photonic crystal if the light frequency falls into a band gap. However, it has been recently suggested<sup>13</sup> that in the case of a 2D periodic medium with a Kerr-type nonlinear material, high-intensity light with frequency inside the gap can propagate in the form of *finite energy solitary waves* – *2D gap solitons*. These solitary waves were found to be *stable*,<sup>13</sup> but the conclusion was based on the coupled-mode equations valid for a *weak modulation* of the dielectric constant  $\varepsilon(\vec{x})$ . However, in real photonic crystals the modulation of  $\varepsilon(\vec{x})$  is *comparable to its average value*. Thus, these results<sup>13</sup> have a limited applicability to the properties of localized modes in *realistic photonic crystals*.

More specifically, the coupled-mode equations are valid if and only if the band gap  $\Delta$  is vanishingly small, i. e.  $\Delta \sim A^2$  where  $A$  is an effective amplitude of the mode, that is a small parameter in the multi-scale asymptotic expansions.<sup>29</sup> If we apply this model to describe nonlinear modes in a wider gap (see, e.g., discussions<sup>29</sup> about), we obtain a 2D nonlinear Schrödinger (NLS) equation known to possess *no stable localized solutions*. Moreover, the 2D localized modes described by the coupled-mode equations are expected to possess an *oscillatory instability* recently discovered for a broad class of coupled-mode Thirring-like equations.<sup>30</sup> Thus, it is clear that, if nonlinear localized modes do exist in realistic PBG materials, their stability should be associated with *different physical mechanisms* not accounted for by simplified continuum models.

In this Section we study the properties of nonlinear localized modes in a 2D photonic crystal composed of *two types of circular rods*: the rods of radius  $r_0$  made from a linear dielectric material and placed at the corners of a

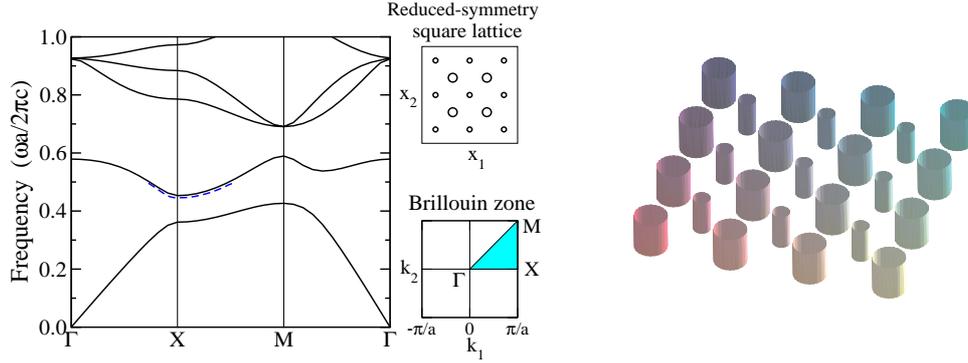

**Figure 5.** Band-gap structure of the reduced-symmetry photonic crystal with  $r_0 = 0.1a$ ,  $r_d = 0.05a$ , and  $\varepsilon = 11.4$  for both types of rods. Full lines are calculated by the MIT Photonic-Bands program<sup>32</sup> whereas dashed line is found from the effective discrete model. The top center inset shows a cross-sectional view of the 2D photonic crystal depicted in the right inset. The bottom center inset shows the corresponding Brillouin zone.

square lattice with the lattice spacing  $a$ , and the rods of radius  $r_d$  made from a nonlinear dielectric material and placed at the center of each unit cell (see right inset in Fig. 5). Recently, such *photonic crystals of reduced symmetry* have attracted considerable interest because of their ability to possess *larger absolute band gaps*.<sup>31</sup> The band-gap structure of the reduced-symmetry photonic crystal is shown in Fig. 5. As is seen, it possesses two band gaps, first of which extends from  $\omega = 0.426 \times 2\pi c/a$  to  $\omega = 0.453 \times 2\pi c/a$ .

The reduced-symmetry “diatomic” photonic crystal shown in Fig. 5 can be considered as a square lattice of the “nonlinear defect rods” of small radius  $r_d$  ( $r_d < r_0$ ) embedded into the ordinary single-rod photonic crystal formed by a square lattice of rods of larger radius  $r_0$  in air. The positions of the defect rods can then be described by the vectors  $\vec{x}_{n,m} = n\vec{a}_1 + m\vec{a}_2$ , where  $\vec{a}_1$  and  $\vec{a}_2$  are the primitive lattice vectors of the 2D photonic crystal. Here, in contrast to the photonic crystal waveguides discussed in the previous section, the nonlinear defect rods are characterized by two integer indices,  $n$  and  $m$ . However, it is straightforward to extend Eq. (12) and write an approximate 2D discrete nonlinear equation

$$i\sigma \frac{\partial}{\partial t} E_{n,m} - E_{n,m} + \sum_{k,l} J_{n-k,m-l}(\omega) (\varepsilon_d^{(0)} + |E_{k,l}|^2) E_{k,l} = 0, \quad (16)$$


for the amplitudes of the electric field  $E_{n,m}(t|\omega) \equiv E(\vec{x}_{n,m}, t|\omega)$  inside the defect rods. We have checked the accuracy of the approximation provided by Eq. (16) solving it in the linear limit, in order to find the band-gap structure associated with linear stationary mode. The low-frequency part of this dependence is depicted in Fig. 5 by a dashed line, with a minimum at  $\omega = 0.446 \times 2\pi c/a$ . One can see that the frequencies of the linear modes calculated from Eq. (16) are in a good agreement with those calculated directly from Eq. (2). It lends a support to the validity of Eq. (16) and allows us to use it for studying nonlinear properties.

Stationary nonlinear modes described by Eq. (16) are found numerically by the Newton-Raphson iteration scheme. We reveal the existence of a *continuous family of such modes*, and a typical example [smoothed by continuous optimization for Eq. (4)] of nonlinear localized mode is shown in Fig. 6. In Fig. 7, we plot the dependence of the mode power


$$Q(\omega) = \sum_{n,m} |E_{n,m}|^2, \quad (17)$$

on the frequency  $\omega$  for the photonic crystal shown in Fig. 5. As we have already discussed, this dependence represents a very important characteristic of nonlinear localized modes which allows to determine their stability by means of the Vakhitov-Kolokolov stability criterion:  $dQ/d\omega > 0$  for unstable modes (this criterion has been extended<sup>33</sup> to 2D NLS models).

As is well known,<sup>33,34</sup> in the 2D discrete cubic NLS equation, only high-amplitude localized modes are stable, whereas no stable modes exist in the continuum limit. For our model, the high-amplitude modes are also stable (see

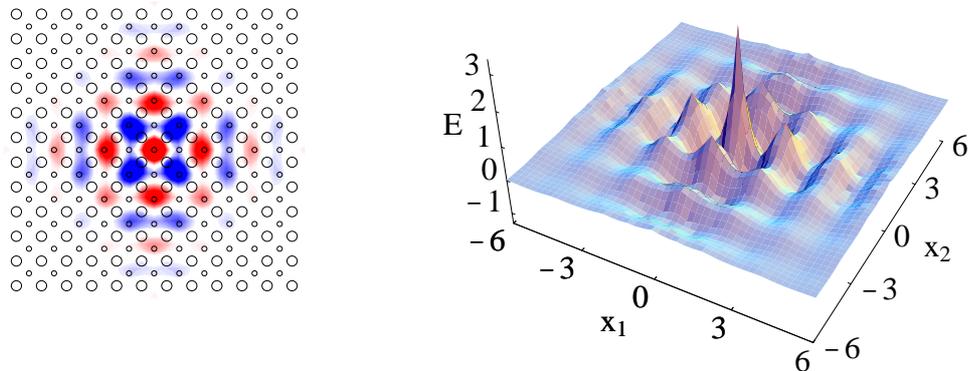

**Figure 6.** Top (left) and 3D (right) views of a nonlinear localized mode in the first band gap of 2D photonic crystal schematically shown in Fig. 5.

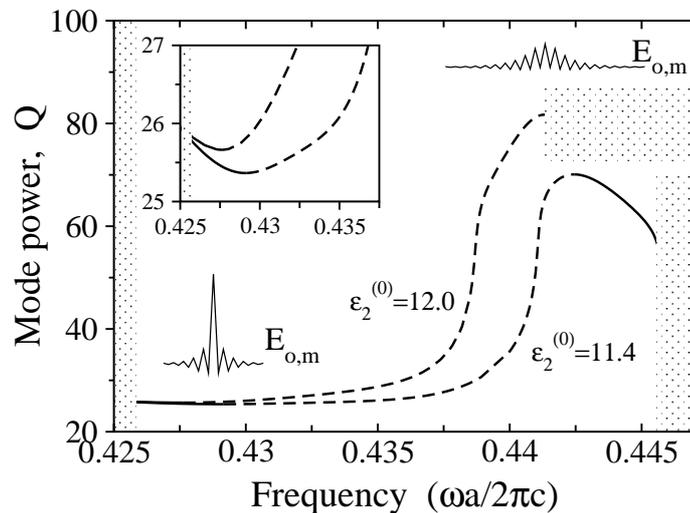

**Figure 7.** Power  $Q$  vs. frequency  $\omega$  for the 2D nonlinear localized modes in the photonic crystal of Fig. 5 with two different  $\epsilon_2^{(0)}$ . Solid lines – stable modes, dashed lines – unstable modes. Grey areas show the projected band structure of the crystal. Insets show typical profiles of stable modes, and an enlarged part of the power dependence.

inset in Fig. 7), but they are not accessible under realistic conditions: To excite such modes one should increase the refractive index at the mode center in more than 2 times. Thus, for realistic conditions and relatively small values of  $\chi^{(3)}$ , only low-amplitude localized modes become a subject of much interest since they can be excited in experiment. However, such modes in unbounded 2D NLS models are always unstable and either collapse or spread out.<sup>35</sup> In fact, they can be stabilized by some external forces (e.g., due to interactions with boundaries or disorder<sup>36</sup>), but in this case the excitations are pinned and cannot be used for energy or signal transfer.

Here we reveal that, in a sharp contrast to the 2D discrete NLS models discussed earlier in various applications, the low-amplitude localized modes of Eq. (16) can be stabilized due to *nonlinear long-range dispersion* inherent to the photonic crystals. It should be emphasized that such stabilization does not occur in the models with only *linear long-range* dispersion.<sup>35</sup> In order to gain a better insight into the stabilization mechanism, we have carried out the studies of Eq. (12) for the exponentially decaying coupling coefficients  $J_{n,m}$ . Our results show that the

most important factor which determines stability of the low-amplitude localized modes is a ratio of the coefficients at the local nonlinearity ( $\sim J_{0,0}$ ) and the nonlinear dispersion ( $\sim J_{0,1}$ ). If the coupling coefficients  $J_{n,m}$  decrease with the distances  $n$  and  $m$  rapidly, the low-amplitude modes of Eq. (16) with  $\epsilon_2^{(0)} = 11.4$  are essentially stable for  $J_{0,0}/J_{0,1} \leq 13$ . However, this estimation is usually lowered because the stabilization is favored by the presence of long-range interactions.

It should be mentioned that the stabilization of low-amplitude 2D localized modes is not inherent to all types of nonlinear photonic crystals. On the contrary, the photonic crystals must be *carefully designed* to support *stable low-amplitude nonlinear modes*. For example, in the photonic crystal considered above such modes are stable at least for  $11 < \epsilon_2^{(0)} < 12$ , however they become unstable for  $\epsilon_2^{(0)} \geq 12$  (see Fig. 7). The stability of these modes can also be controlled by varying  $r_2$ ,  $r_1$ , or  $\epsilon_1$ . Thus, experimental observation of the nonlinear localized modes would require not only the use of photonic materials with a relatively large nonlinear refractive index (such as GaAs/AlAs periodic structures<sup>39</sup> or polymer PBG crystals<sup>40</sup>), but also a fine adjustment of the parameters of the photonic crystal. The latter can be achieved, in principle, by employing the surface coupling technique<sup>41</sup> that is able to provide coupling to specific points of the dispersion curve, opening up a very straightforward way to access nonlinear effects.

## 7. CONCLUDING REMARKS

We have developed a consistent theory of nonlinearity-induced self-trapping effects in 2D nonlinear photonic crystals and predicted the possibility of the energy localization in the form of stable 2D nonlinear localized modes. As follows from our results, nonlinear localized modes can be described by a new type of nonlinear lattice models that include long-range interaction and effectively nonlocal nonlinear response. It is expected that the general features of nonlinear guided modes described here will be preserved in other types of photonic crystal waveguides. Additionally, similar types of nonlinear localized modes are expected in photonic crystal fibers<sup>37</sup> consisting of a periodic air-hole lattice that runs along the length of the fiber, provided the fiber core is made of a highly nonlinear material.<sup>38</sup>

Exploration of nonlinear properties of PBG materials may open new important application of photonic crystals for all-optical signal processing and switching, allowing an effective way to create tunable band-gap structures operating entirely with light. Nonlinear photonic crystals and nonlinear waveguides created in the photonic structures with a periodically modulated dielectric constant create an ideal environment for the generation and observation of nonlinear localized modes.

## ACKNOWLEDGMENTS

The authors are indebted to K. Busch, S. John, A. McGurn, and C. Soukoulis for encouraging discussions, and R. Sammut for useful collaboration and support. S.M. thanks Yu.B. Gaididei, P.L. Christiansen, and O. Bang for productive discussions, and he acknowledges a support from the European Commission RTN project LOCNET (HPRN-CT-1999-00163). The work has been partially supported by the Planning and Performance Fund of the Institute of Advanced Studies.

## REFERENCES

1. J. D. Joannopoulos, R. B. Meade, and J. N. Winn, *Photonic Crystals: Molding the Flow of Light* (Princeton University Press, Princeton N.J., 1995).
2. J. G. Fleming and S.-Y. Lin, *Opt. Lett.* **24**, 49 (1999).
3. See, e.g., K. Busch and S. John, *Phys. Rev. Lett.* **83**, 967 (1999), and discussion therein.
4. V. Berger, *Phys. Rev. Lett.* **81**, 4136 (1998); and also the recent experiment: N.G.R. Broderick, G.W. Ross, H.L. Offerhaus, D.J. Richardson, and D.C. Hanna, *Phys. Rev. Lett.* **84**, 4345 (2000); S. Saltiel and Yu.S. Kivshar, *Opt. Lett.* **25**, 1204 (2000).
5. See, e.g., S. Flach and C.R. Willis, *Phys. Rep.* **295**, 181 (1998); O.M. Braun and Yu.S. Kivshar, *Phys. Rep.* **306**, 1 (1998), Chap. 6.
6. R.S. MacKay and S. Aubry, *Nonlinearity* **7**, 1623 (1994); see also S. Aubry, *Physica D* **103**, 201 (1997).
7. B.I. Swanson, J.A. Brozik, S.P. Love, G.F. Strouse, A.P. Shreve, A.R. Bishop, W.Z. Wang, and M.I. Salkola, *Phys. Rev. Lett.* **82**, 3288 (1999).
8. U.T. Schwarz, L.Q. English, and A.J. Sievers, *Phys. Rev. Lett.* **83**, 223 (1999).

9. E. Trias, J.J. Mazo, and T.P. Orlando, Phys. Rev. Lett. **84**, 741 (2000); P. Binder, D. Abraimov, A.V. Ustinov, S. Flach, and Y. Zolotaryuk, Phys. Rev. Lett. **84**, 745 (2000).
10. F.M. Russel, Y. Zolotaryuk, and J.C. Eilbeck, Phys. Rev. B **55**, 6304 (1997).
11. H.S. Eisenberg, Y. Silberberg, R. Marandotti, A.R. Boyd, and J.S. Aitchison, Phys. Rev. Lett. **81**, 3383 (1998).
12. A.A. Sukhorukov, Yu.S. Kivshar, O. Bang, J. Martorell, J. Trull, and R. Vilaseca, Optics and Photonics News **10** (12) 34 (1999).
13. S. John and N. Aközbek, Phys. Rev. Lett. **71**, 1168 (1993); Phys. Rev. E **57**, 2287 (1998).
14. A.A. Sukhorukov, Yu.S. Kivshar, and O. Bang, Phys. Rev. E **60**, R41 (1999).
15. A. R. McGurn, Phys. Lett. A **251**, 322 (1999); Phys. Lett. A **260**, 314 (1999).
16. S. F. Mingaleev, Yu. S. Kivshar, and R. A. Sammut, Phys. Rev. E **62**, 5777 (2000).
17. A. A. Maradudin and A. R. McGurn, in *Photonic Band Gaps and Localization, NATO ASI Series B: Physics*, Vol. 308, Ed. C. M. Soukoulis (Plenum Press, New York, 1993), p. 247.
18. A. Mekis, J.C. Chen, I. Kurland, S. Fan, P.R. Villeneuve, and J.D. Joannopoulos, Phys. Rev. Lett. **77**, 3787 (1996).
19. A. Mekis, S. Fan, and J. D. Joannopoulos, Phys. Rev. B **58**, 4809 (1998).
20. A. J. Ward and J. B. Pendry, Phys. Rev. B **58**, 7252 (1998).
21. S.-Y. Lin, E. Chow, V. Hietala, P.R. Villeneuve, and J.D. Joannopoulos, Science **282**, 274 (1998).
22. M. Tokushima, H. Kosaka, A. Tomita, and H. Yamada, Appl. Phys. Lett. **76**, 952 (2000).
23. S. S. M. Cheng, L. M. Li, C. T. Chan, and Z. Q. Zhang, Phys. Rev. B **59**, 4091 (1999).
24. C. Jin, B. Cheng, B. Mau, Z. Li, D. Zhnag, S. Ban, B. Sun, Appl. Phys. Lett. **75**, 1848 (1999).
25. S. Fan, P. R. Villeneuve, J. D. Joannopoulos, and H. A. Haus, Phys. Rev. Lett. **80**, 960 (1998).
26. Y. B. Gaididei, S. F. Mingaleev, P. L. Christiansen, and K. Ø. Rasmussen, Phys. Rev. E **55**, 6141 (1997).
27. M. Johansson, Y. B. Gaididei, P. L. Christiansen, and K. Ø. Rasmussen, Phys. Rev. E **57**, 4739 (1998).
28. See, e.g., the examples for the continuous generalised nonlinear Schrödinger models, D. E. Pelinovsky, V. V. Afanasjev, and Yu. S. Kivshar, Phys. Rev. E **53**, 1940 (1996).
29. Yu. S. Kivshar, O. A. Chubykalo, O. V. Usatenko, and D. V. Grinyoff, Int. J. Mod. Phys. B **9**, 2963 (1995).
30. I. V. Barashenkov, D. E. Pelinovsky, and E. V. Zemlyanaya, Phys. Rev. Lett. **80**, 5117 (1998); A. De Rossi, C. Conti, and S. Trillo, Phys. Rev. Lett. **81**, 85 (1998).
31. C. M. Anderson and K. P. Giapis, Phys. Rev. Lett. **77**, 2949 (1996); Phys. Rev. B **56**, 7313 (1997).
32. S. G. Johnson, <http://ab-initio.mit.edu/mpb/>
33. E. W. Laedke, K. H. Spatschek, V. K. Mezentsev, S. L. Musher, I. V. Ryzhenkova, and S. K. Turitsyn, JETP Lett. **62**, 677 (1995).
34. E. W. Laedke, K. H. Spatschek, S. K. Turitsyn, and V. K. Mezentsev, Phys. Rev. E **52**, 5549 (1995); Yu. B. Gaididei, P. L. Christiansen, K. Ø. Rasmussen, and M. Johansson, Phys. Rev. B **55**, R13365 (1997).
35. See, e.g., V. K. Mezentsev, S. L. Musher, I. V. Ryzhenkova, and S. K. Turitsyn, JETP Lett. **60**, 829 (1994); S. Flach, K. Kladko, and R. S. MacKay, Phys. Rev. Lett. **78**, 1207 (1997); P. L. Christiansen, Yu.B. Gaididei, M. Johansson, K. Ø. Rasmussen, V.K. Mezentsev, and J.J. Rasmussen, Phys. Rev. B **57**, 11303 (1998).
36. Yu. B. Gaididei, D. Hendriksen, P. L. Christiansen, and K. Ø. Rasmussen, Phys. Rev. B **58**, 3075 (1998).
37. T.A. Birks, J.C. Knight, and P.St.J. Russell, Opt. Lett. **22**, 961 (1997).
38. B.J. Eggleton, P.S. Westbrook, R.S. Windeler, S. Spälter, and T.A. Strasser, Opt. Lett. **24**, 1460 (1999).
39. P. Millar M. De La Rue, T.F. Krauss, J.S. Aitchison, N.G.R. Broderick, D.J. Richardson, Opt. Lett. **24**, 685 (1999); A.A. Helmy, D.C. Hutchings, T.C. Kleckner, J.H. Marsh, A.C. Nryce, J.M. Arnold, C.R. Stanley, J.S. Aitchison, C.T. Brown, K. Montzouris, and M. Ebrahimzadeh, Opt. Lett. **25**, 1370 (2000).
40. S. Shoji and S. Kawata, Appl. Phys. Lett. **76**, 2668 (2000).
41. V. N. Astratov, D.M. Whittaker, I.S. Culshaw, R.M. Stevenson, M.S. Skolnick, T.F. Kraus,, and R.M. De La Rue, Phys. Rev. B **60**, R16255 (1999).